


ROBUS®

EMERGENCY

CARINA Emergency Downlight 2W, IP20

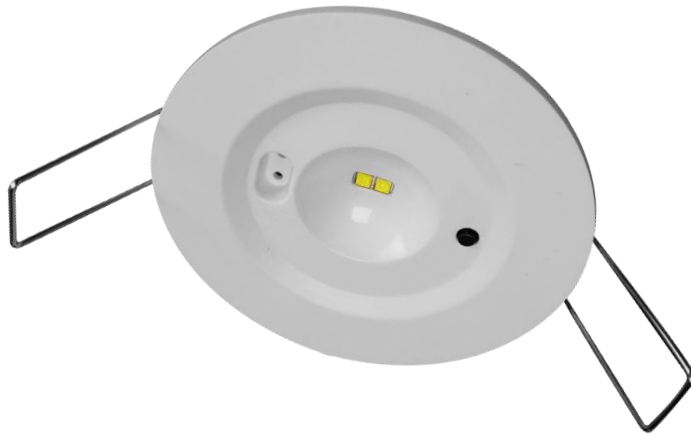


PRODUCT INFORMATION DOCUMENT

FEATURES

- Selectable between Manual Test facility and Self Test facility that fully automates testing and maintenance process
- High lumen output, suitable for greater mounting heights
- LiFePO4 battery technology provides fast charge, a high number of charge/discharge cycles and a 3 hour emergency light output

CONSTRUCTION



- Polycarbonate housing
- High power OSRAM LEDs
- Spring steel spring clips

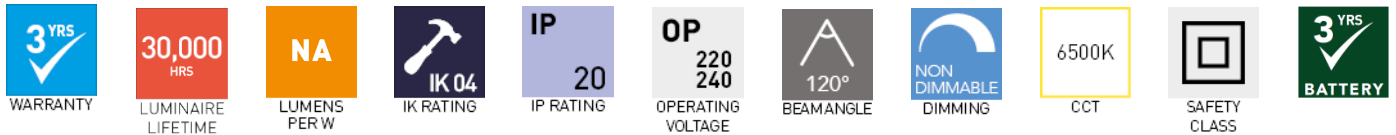

	RCN4STO-01
Comparable to:	35W halogen
Total Power (W):	2.4
Total Light Output (lm):	NA
Total Emergency Light Output (lm):	320
Efficacy (lm/cctW):	NA
IP:	20
Operation Temperature (°C)	0 ≤ Ta ≤ +40
Lux at 1m (lux):	NA
Emergency Lux at 1m (lux):	100
Inrush Current:	25A/1ms
CCT (K):	6500
RG Value:	0
Rated Life to L70B50 (Hrs):	NA
Dimensions ØxH (mm):	75x30
Cut Out (mm):	60
Weight (kg):	0.25

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

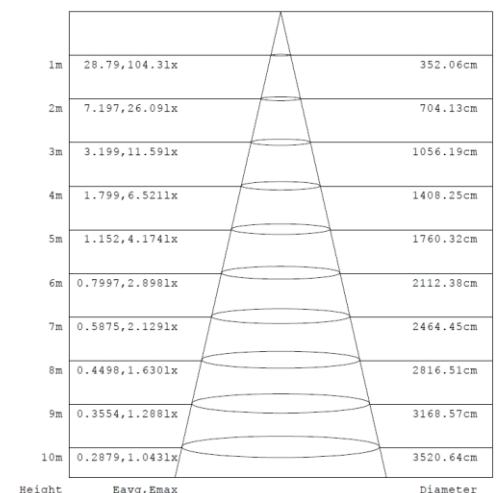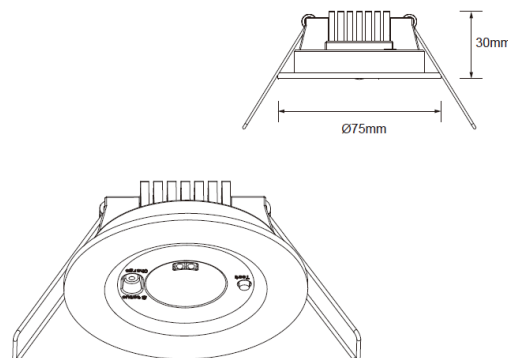

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
 WEB: ROB.US.COM
 WEB: ROB.US.COM.AU
 WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA