# **OUTDOOR**



# LUNAR 7W LED, 2 & 3 WINDOW PATH-FINDER LIGHTS IP54 RATED, 3,000K, DARK GREY

These attractive looking LED wall lights not only provide functional light for paths and walkways, but also great effect lighting to enhance a buildings lower façade. They also use very little energy thereby contributing to reducing CO<sup>2</sup> emissions and a buildings Carbon Footprint



# Applications:

- Patio and decking areas
- Either side of building entrances
- Apartment stairways and landings
- Path and walkways around
  - Domestic houses
  - Hotels
  - Restaurants
  - Public houses
  - Offices

### **Construction:**

Die-cast aluminium main body housing and cover Dark grey powder coated finishing process Opal glass diffusers Stainless steel cover screws Aluminium/FR-4 PCB

#### Features: Benefits:

Two or three window designs	<ul> <li>Provides a choice of light spread</li> </ul>	
Diecast aluminium housing with dark grey powder coated finish using an electrophoresis process Impact rating of IK08 Stainless steel cover retaining screws	<ul> <li>Strong &amp; durable</li> <li>Anti-corrosive high-quality finish that will always look attractive</li> <li>Provides excellent heat dissipation for longer LED and driver life</li> </ul>	
Opal glass light emitting windows	Provide a low glare uniform spread of light	
Utilises high quality Osram SMD LED's  High lumen output  Low power consumption  Long Rated LED Life  High quality, high CRI warm white light	<ul> <li>LED replacement for traditional Halogen</li> <li>Provides comparable light output</li> <li>High efficacy for massive energy savings</li> <li>No inconvenient lamp failures</li> <li>Provides a subtle ambience lighting effect</li> </ul>	
Solid State Technology	<ul> <li>"Instant on" to ensure immediate visibility</li> <li>Rugged with no filaments to prematurely fail</li> <li>Compatible with PIR, photocell &amp; microwave switching without compromise to LED life</li> </ul>	
Integral driver	No separate enclosure required for power supply	
No Infra-red or Ultra-violet in the light beam	<ul><li>Is cool to touch so will not burn if touched</li><li>Does not attract most flying insects</li></ul>	
Wide ambient temperature operating range	Not adversely affected by hot and cold temperature extremes	
Mounting stand-offs integrated into base	Makes for easy fixing onto uneven, pebble dash or rendered walls without stressing the aluminium	
Straight forward Robus Warranty	No internet registration or forms to be filled in	





# **OUTDOOR**



# LUNAR 7W LED, 2 & 3 WINDOW PATH-FINDER LIGHTS IP54 RATED, 3,000K, DARK GREY

Product Code:	RLN7302W-25	RLN7303W-25
Comparable to LV Halogen (W):	20	20
Total Power (W):	7.2	7.1
Total Light Output (lm):	310	310
Efficacy (lm / cctW):	43	44
Rated LED Life (hrs):	30,000	30,000
Warranty (yrs):	3	3
Beam Angle (deg):	110	360
CCT (K):	3,000	3,000
CRI (Ra):	80	80
Ingress Protection (IP):	54	54
Impact Rating (IK):	06	06
Operating Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Operating Voltage (Vac):	220-240	220-240
Power Factor (PF):	0.9	0.9
Height (mm):	63	44
Width (mm):	NA	143
Diameter (mm):	145	NA
Depth (mm):	NA	138
Box Qty:	1	1
Weight (kg):	0.54	0.55

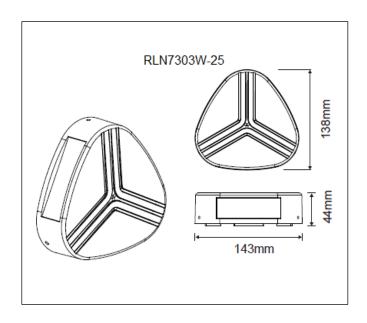

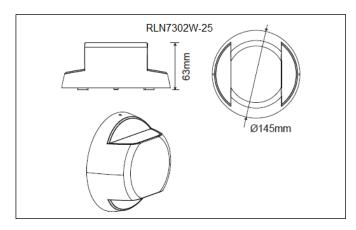

# Standards & Approvals:

IRE:

AUS:

Complies with: EN 60598-1, EN60598-2-1, EN 55015, EN61000-3-2, EN61000-3-3, EN 62493, EN 61547



